

TOOLS - EQUIPMENT – SUPPLIES LIST



ITEMS: SS OVERALL / COLOR: BROWN – GREY



ITEM: SS HARNESSES FALL PROTECTION





ITEM: SS - TOOL BUCKET



PULLEYS



ITEMS: SS 4 SHELF MEDICAL AID



3 SHELF MEDICAL AID



4 SHELF METAL FIRST AID / 3 SHELF ALSO AVAILABLE



DESERT / HEAT STRESS AID

compliant,

This kit includes the following:

- 4 Instant Cold Compress,
- 4 SQWINCHER fastpack
- 25 Electrolyte pouches
- 2 Waterproof Adhesive
- 1 Survival Blanket
- 1 Fever Scan Thermometer



Bloodborne Pathogen 10 Series Kit OSHA

designed to cater for all bloodborne related spills in the workplace. A blood borne spill is an unintended release of a potentially infectious material.



ITEM: SS / EYE WASH SALINE 9 GALLON



WALL UNIT – EYE SALINE SOLUTION 32 OZ



Gas Flow Regulator

Two regulators in one. Designed for use with all Model RP and Econo-Cal Calibration Cylinders. Supplied with calibration tubing and a special fitting.



Microclip XL- Personal Multigas Detector

MORE ITEMS AND MODELS AVAILABLE

Supported Gases

H₂S – CO – O₂ – LEL



BW SR-X2V Replacement Oxygen Sensor for BW Multiple Gas Detectors, O₂



Precision Calibration GAS Mixtures



SPECIAL GLOVES FOR SANDY AND OILY PROJECTS



ALL ABOVE ITEMS CODE: SS

ALSO AVAILABLE:

HEAD PROTECTION

- MSA V-Gard
- Radian Quartz Full Brim
- Lift Full Brim Carbon Fiber
- MSA FAS-TRAC® III Standard- Sized 4-Point Replacement Suspension

H2S MONITORS & ACCESSORIES

- 2 yr disposable
- Gas Alert no pump
- Quad Gas w/pump
- Sampling Prob & Hose
- 58L Gas 25ppm

HEARING PROTECTION

- Reusable
- Corded
- Disposable

HEAT RELATED

- Electrolyte Freezer Pop
- Quik Stick Zero Packet Sugar Free
- Pickle Pops
- Cooling Bandana

- Hard Hat Cooling Sweatbands
- Hard Hat Shade

ALL ABOVE CODE IS ASS

- FOOT PROTECTION
- FIRE RESISTANT CLOTHING
- WELDERS CLOTHING
- COLD WEATHER CLOTHING
- BREATHING PROTECTION
(CODE TSS)

EQUIPMENT:



250 / 350 / 750 Ton Elevator Spider / CODE: TI



HT Manual Tongs / CODE: TI



Product Information / CODE TI

Part No:

T4STAND-20 – 1 Calipers*

Max Torque 20,000 ft/lbs

T4STAND-40 – 2 Calipers*

Max Torque 40,000 ft/lbs

T4STAND-60 – 3 Calipers*

Max Torque 60,000 ft/lbs

T4STAND-80 – 4 Calipers*

Max Torque 80,000 ft/lbs

Maximum Mandrel Size:13-5/8"


Maximum Torque: up to 80,000 ft/lbs

Maximum Mandrel RPM:15

CASING TOOLS



ITEMS CODE: TI / Single Joint Elevator 2-3/8" to 30" • 5 Ton

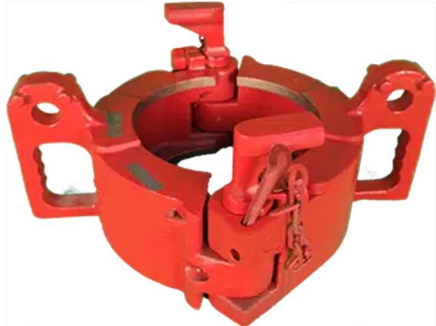

ITEM CODE: TI / SJX Single Joint Elevator 2-3/8" to 14" • 5 Ton



ITEM CODE: TI / Side Door Elevator 2-3/8" to 42" | 100 Tons – 500 Tons



ITEM CODE: TI / SX Side Door Elevator 9-5/8" to 18-5/8" | 350 Ton – 500 Ton



ITEM CODE TI: A Series Center Latch Elevator 2-3/8" to 11-1/4" • 65 Ton to 150 Ton



ITEM CODE TI: Y Series Slip Type Elevators MYT • YT • YC • MYC • HYC



ITEM CODE TI: 10-3/4" 150 Ton Bowl 100 Ton – 8-5/8" API Bowl & 150 Ton – 10-3/4" API Bowl



ITEM CODE TI: 36" 500 Ton Hinged Casing Spider



ITEM CODE TI: Pneumatic Hinged Casing Spider 36 " • 500 Ton



ITEM CODE TI: ProTech Thread Protectors

Latch and adjustment plates are easily accessible to the user

Mechanical latch does not require air actuation

Non-ferrous metal parts will not rust or corrode

Inexpensive latch belt assembly replaced without affecting the body

Competitively priced in sizes 4 1/2" to 16"

Extended-lip (XL) protectors will grab premium "tapered" connections and will not allow the pin-nose to extend past the protective urethane lip

20% – 40% Lighter than Competitors' Product


DRILLING TOOLS



ITEM CODE TI: Weldless Elevator Bails Elevator Bails, Weldless Links



TI CODE: Becket & Tool Pushing Links

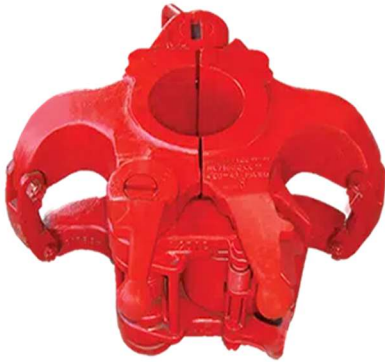

TI CODE: Drill Pipe Elevator 18° Bottleneck • G Series



TI CODE: Drill Bowls #1, #2, and #3 designed to fit inside the MPCH and MSPC Master Bushings.



CODE TI: Pneumatic Tubing Spider Type C, CHD, E, F
Model CHD: 1.315" – 5-1/2" 125 Ton
Model E: 2-3/8" – 7-5/8" 175 Ton
Model F: 2-3/8" – 8-5/8" 200 Ton



CODE TI: Type "T" Safety Clamps
New sizes:
1-1/8" up to 4-1/2"
1-1/8" – 2"
2-1/8" – 3-1/4"
3-1/4" – 4-1/2"
Options:
Air Over Hydraulic



CODE TI: New sizes: 3-3/4" to 47" (OVER 15 SIZES AVAILABLE)



**CODE TI: Multi-Purpose (MP) Safety Clamps Adjustable to a variety of tubular
Sizes: 2-7/8" to 30-1/2" Options: Air Over Hydraulic**



CODE TI: Kelly Drive Bushings HDP, HDS Hex Pin • Square Pin

ROTARY TOOLS



CODE TI: Type "C" Air Over Hydraulic OVER 15 SIZES AVAILABLE



CODE TI: UC3/UC4 Casing Slip 7" to 36" • Rotary Tools



CODE TI: CMS-XL Casing Slip 6-5/8" to 42" • Rotary Tools



ITEM CODE TI: SD Style Rotary Slips SDS, SDML, SDXL

SDS – 2-3/8"-4-1/2"

SDML- 2-3/8"-5-1/2"

SDXL- 3-1/2"-5-1/2"

SDXL- 5-7/8"-7"



ITEM CODE IT: DU Rotary Slip DU-R, DU-L

DU-R (Regular)

SIES REGUALR AND LONG

4-1/2" – 2-3/8"

5-1/2" – 4-1/2"

7" – 6-5/8" - 7"

POWER TONGS



ITEM CODE: SPT

5-1/2" Hydraulic Power Tong

Rated Torque: 22,000 Ft-Lb

Rated Operating Pressure: 2,500 PSI

8595 (9-5/8") Hydraulic Power Tongs

Rated Torque: 32,000 ft-lb

Rated Operating Pressure: 2,500 psi

13 5/8" Hydraulic Power Tongs

Rated Torque: 35,000 ft-lb

Rated Operating Pressure: 2,500 psi

6 1/4" Hydraulic Power Tongs

Rated Torque: 30,000 ft-lb

Rated Operating Pressure: 2,500 psi

9 7/8" Hydraulic Power Tongs

Rated Torque: 40,000 or 60,000 ft-lb

Rated Operating Pressure: 2,500 psi

14" Hydraulic Power Tongs

Rated Torque: 50,000 or 75,000 ft-lb

Rated Operating Pressure: 2,500



CODE ITEM: SPT

6 1/4" BACKUP ASSEMBLY, 25k FT-LBS, WEDGE STYLE, 8IN² COMP. LOADCELL MOUNT KIT

Designed for use with Tong 5 1/2"

Jaw Capacity: 2 3/8" - 6 1/4"

Max Working Pressure: 3,000 PSI

Jaw Capacity: 2-1/16" – 7"

Max Working Pressure: 3,000 PSI

Jaw Capacity: 3 1/2" - 10 3/4"

Max Working Pressure: 3,000 PSI

Jaw Capacity: 3 1/2" - 10 3/4"

Max Working Pressure: 2,500 PSI

Jaw Capacity: 5 1/2" - 15"

Max Working Pressure: 3,000 PSI

Jaw Capacity: 5 1/2" - 15"

Max Working Pressure: 2,500 PSI

DOWNHOLE TOOLS

ITEM CODES: OSC



BHA & Impact Tools

We can provide BHA tools that include (but are not limited to): jars, shock tools, stabilization/reaming tools (roller reamers, diamond enhanced reamers) and tubulars (drill collars and HeviWate):

Roller Reamers:

Smith Model 60 Open Bearing

Smith Borrox AP Sealed Bearing

Schlumberger On Gage Premium Sealed Bearing

Diamond Enhanced Drilling Tools (e.g. Dog Subs, Porcupine Reamers)

BHA Tubulars (Drill Collars & Heavy Water Drill Pipe)

Impact Tools

Hydra Jar Impact System: Double-Acting Hydraulic Jar and Accelerator

Hydra Quaker Double-Acting Hydraulic Jar

Schlumberger Shock Tool



Hole Enlargement Systems

Prior to the Rhino Reamer, Smith had a tiered offering of traditional underreamers. The following list is in order of more to less premium. The more premium product generally has a smaller opening diameter, greater durability, and more readily integrated into a drilling system.

XTU ReamMaster Underreamer

DTU Drilling Type Underreamer

RTU Rock Type Underreamer



Drill Bits

Diamant Drilling Services, an API Certified and European based drilling bits supplier to the Oil and Gas drilling industry, designs and manufactures entire sweep of fixed cutter bit options listed below:

Steel and Matrix Body PDC Bits

MicroCORE® Bits

StormEYE® Bits

Impregnated Bits

Dual Cutting Structure Bits

Core Heads

Bi-Center Bits

KamiCASE™ Casing Drilling Bits

SlickWELL™ Reamers and Hole Openers



Wellbore Clean-UP

Odfjell Well Services Wellbore Clean-Up Tools: We can provide all available options. This includes but is not limited to:

The RazRdillo™ Casing Scraper
The ScourRdillo™ Casing Brush
MunchRdillo™ Scraper Milling Tool
MAGStar4™ HD Casing Magnet
PiRanha™ Junk XTractR™
XTractR™ BOP Junk Catcher
XTractR™ WellBore Filter Tool
VeRidrift™ Casing Drift
Short Trip Jetting Sub



Dynamax Products

Dynamax supplies leading performance drilling products engineered for the oil and gas industry. We provide high value products and services for vertical, directional and horizontal drilling operations worldwide.

Our product lines include:

Mud Motors

Shock Tools

Slide Reamers

which bear our industry-leading technologies backed by experience in the field – tools that are built for extended uses. Our QA/QC Program ensures that every tool meets or exceeds expectations in the field.



Wellbore Departure Systems

Wildcat Oil Tools XpressDrill Wellbore Departure System

We can provide the following available options from Wildcat Oil Tools XpressDrill Wellbore

Departure System:

Cased Hole System

Open Hole System

Cementable Whipstock System



Weatherford QuickCut™ Whipstocks systems

We can provide the following available options from Weatherford QuickCut™ Whipstocks systems:

Shallow-Angle QuickCut™ Casing Exit System RHS*-Type Anchor

QuickCut™ Casing-Exit System RMN- and RHN-Type Anchors.

DRILL PIPES



Premium Threads Drill Pipe

Grant Prideco – XT, HT, TT, GDS, HT-PAC, SST

NKK / DSTJ

VAM VX

TSC – TSDS



Premium Threads Casing/Tubing

Tenaris – Blue, SAGD, ER, MS XT/XC, MS28

Tenaris – MS28 XT/XC, MS, MS SR, RTS6, RTS8

Tenaris – RTS6, RTS8

VAM – TOP, HC, HT

Express, EIS, CDS

Weatherford – FJWP

ITEM CODE : PEC

PLUG VALVES:



PV1A 2" x 1" 15M (Male x Female) Integral W/ 1502 Union Connection

PV2 2" x 2" 15M (Male x Female) Integral W/ 1502 Union Connection

PV2A 2" x 2" 10M (Threaded x Female) W/ Line Pipe (LP) Connection

MUD GAUGES



MGD21MT 2" Male Threaded Connection 1,000 PSI

MGD23MT 2" Male Threaded Connection 3,000 PSI

MGD25MT 2" Male Threaded Connection 5,000 PSI

MGD26MT 2" Male Threaded Connection 6,000 PSI

MGD31MT 3" Male Threaded Connection 1,000 PSI

MGD33MT 3" Male Threaded Connection 3,000 PSI

MGD35MT 3" Male Threaded Connection 5,000 PSI

MGD36MT 3" Male Threaded Connection 6,000 PSI

MGDF Flanged Connection (SPECIFY PRESSURE)

MGDWN 1502 Wingnut Connection (SPECIFY PRESSURE)



| | |
|----------|---|
| MGF21FT | 1" Female Threaded Connection 1,000 PSI |
| MGF23FT | 1" Female Threaded Connection 3,000 PSI |
| MGF26FT | 1" Female Threaded Connection 6,000 PSI |
| MGF21MT | 2" Male Threaded Connection 1,000 PSI |
| MGF23MT | 2" Male Threaded Connection 3,000 PSI |
| MGF26MT | 2" Male Threaded Connection 6,000 PSI |
| MGF210MT | 2" Male Threaded Connection 10,000 PSI |
| MGF26WN | 2" 1502 Wingnut Bottm 6,000 PSI |
| MGF210WN | 2" 1502 Wingnut Bottm 10,000 PSI |
| MGF215WN | 2" 1502 Wingnut Bottm 15,000 PSI |
| MGF36WN | 3" 1502 Wingnut Bottm 6,000 PSI |
| MGF310WN | 3" 1502 Wingnut Bottm 10,000 PSI |
| MGF315WN | 3" 1502 Wingnut Bottm 15,000 PSI |
| MGF5F | 5,000 PSI Flanged Connection |
| MGF10F | 10,000 PSI Flanged Connection |

LIFTING BAILS



| | |
|-------------|---------------------|
| LB34IFB | 3 1/2" IF (Box) |
| LB34IFP | 3 1/2" IF (Pin) |
| LB40IF44XHB | 4"IF/4 1/2 XH (Box) |
| LB40IF44XHP | 4"IF/4 1/2 XH (Pin) |
| LB44IFB | 4 1/2" IF (Box) |
| LB44IFP | 4 1/2" IF (Pin) |

LB65LHB 7 5/8" Regular Left Hand (Box)
 LB65LHP 6 5/8" Regular Left Hand (Pin)
 LBXT39B 4" XT39 (Box)
 LBXT39P 4" XT39 (Pin)

DRILL PIPE FLOAT VALVES



| Valve | Valve PN# | Rubber Repair Kit PN# | Metal Repair Kit PN# |
|-------------------|-----------|-----------------------|----------------------|
| 1R, Model F | FV31200 | RR12200 | MR29800 |
| 1F-2R, Model F | FV31422 | RR12300 | MR11300 |
| 2F-3R, Model F | FV32432 | RR12400 | MR11400 |
| 3F, Model F | FV33400 | RR12500 | MR11500 |
| 3 1/2 IF, Model F | FV33600 | RR12600 | MR11500IF |
| 4R, Model F | FV34200 | RR12700 | MR11700 |
| 4F, Model F | FV34400 | RR12800 | MR11800 |
| 5R, Model F | FV35200 | RR12900 | MR11900 |
| 5F-6R, Model F | FV35462 | RR13000 | MR12000 |
| 1F-2R, Model G | FV51422 | RR88300 | MR88400 |
| 2F-3R, Model G | FV52432 | RR13800 | MR13200 |
| 3F, Model G | FV53400 | RR13900 | MR13300 |
| 3 1/2 IF, Model G | FV53600 | RR82000 | MR36700 |
| 4R, Model G | FV54200 | RR14000 | MR13400 |
| 4F, Model G | FV54400 | RR14100 | MR13500 |
| 5R, Model G | FV55200 | RR14200 | MR13600 |
| 5F-6R, Model G | FV55462 | RR14300 | MR13700 |

| | | | |
|--------------------|---------|---------|---------|
| 2F-3R, Model GA | FV62432 | RR13800 | MR35000 |
| 3 1/2 IF, Model GA | FV63600 | RR82000 | MR36700 |
| 4R, Model GA | FV64200 | RR14000 | MR16000 |
| 4F, Model GA | FV64400 | RR14100 | MR36800 |
| 5R, Model GA | FV65200 | RR14200 | MR36900 |
| 5F-6R, Model GA | FV65462 | RR14300 | MR34200 |

LANDING NIPPLES



| | |
|----------|-----------------------|
| NIP238X | 2-3/8" EUE (8RD) "X" |
| NIP238XN | 2-3/8" EUE (8RD) "XN" |
| NIP278X | 2 7/8" EUE (8RD) "X" |
| NIP278XN | 2 7/8" EUE (8RD) "XN" |